

Model DRS8300X

WIDEBAND TELEMETRY RECORDER



KEY FEATURES

- 3200+ Mbps Sustained Data Rate Record and Playback
- Native IRIG-106 Chapter 10 Recording Format
- Direct Replacement for Legacy Products
- Data Export and Data Monitoring while Recording
- Two Removable Diskbanks
 - Capacity up to 12TB per Bank Solid-state or Rotary Disk Drives
- Flexible Recording Modes:
 - Striped, Mirrored, or Sequential
- Accepts up to three Interface Boards
 - Field Installable and Upgradable
- Timing Interfaces
 - Accepts IRIG-A, IRIG-B, and IRIG-G
 - External 1PPS and 10MHz Reference
 - Optional NASA 36


GENERAL DESCRIPTION

The DRS8300X is the workhorse member of the Industry-leading Digital Recording System (DRS) product family. Optimized for the Telemetry market, the DRS8300X provides exceptional bandwidth and scalability while maintaining strict compliance with the IRIG-106 Chapter 10 standard.

The DRS8300X accepts up to three user-installable Interface Boards (IFBs) providing extensive support for a wide range of telemetry applications. Employing a dual-disk bank architecture, the system provides user-selectable, flexible recording modes: striped (high data rate), mirrored (redundancy), or sequential (extended duration).

With a storage capacity of 6 to 24TB and an aggregate data rate of 3200+ Mbps, the DRS8300X is uniquely qualified for the most demanding telemetry requirements. The DRS8300X excels in pre-detect analog, post-detect digital PCM, and direct IF recording, as well as Video, Ethernet, Serial, and MIL-STD-1553 recording.

Building on the success of our robust and reliable Digital Recording Systems, Wideband Systems has raised the bar again – Introducing the Next Generation Digital Recording System – the DRS8300X.

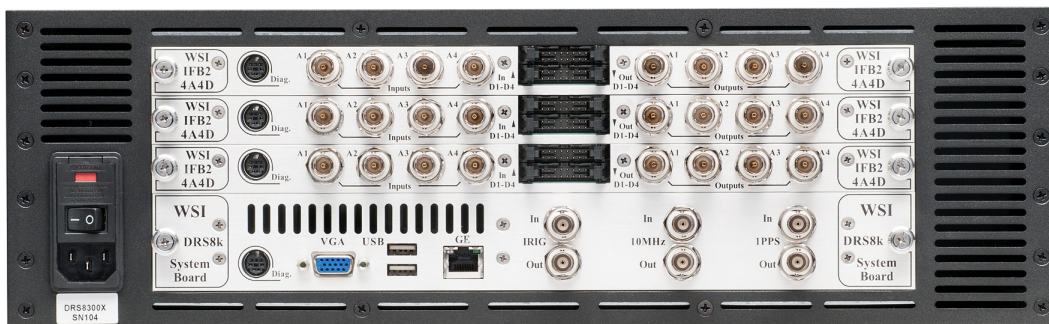

**All system boards now come standard with a Display Port and dual USB 3.0 ports. VGA is no longer offered as a standard video output.*


DATA RECORDING

Model DRS8300X

WIDEBAND TELEMETRY RECORDER

TECHNICAL SPECIFICATIONS

Dimensions:	5.25 x 19 x 23.5 inches
Weight:	40 pounds (18.1 kg)
Temperature	
Operational:	5 to 50 degrees Celsius
Non-Operational:	-25 to 65 degrees Celsius
Humidity:	5% to 95%, non-condensing
Power (VAC):	90-132 and 180-264 VAC
Power (Hz):	47 to 63 Hz
Power (Watts):	<350 Watts
Record Media:	Two Removable Diskbanks
Disks/Diskbank:	Six 2.5" Disks
Disk Type:	Hard Disk or Solid-State Disk
Disk Interface:	SAS or SATA
Diskbank Capacity:	3TB (optional to 12TB)
Operator Control:	Local Control via Front Panel 6.5" Touch Screen and/or auxiliary KVM Remote Control via Network attached PC
Data Transfer:	Data Transfer (Import/Export) to local USB and eSATA drives and Network attached devices

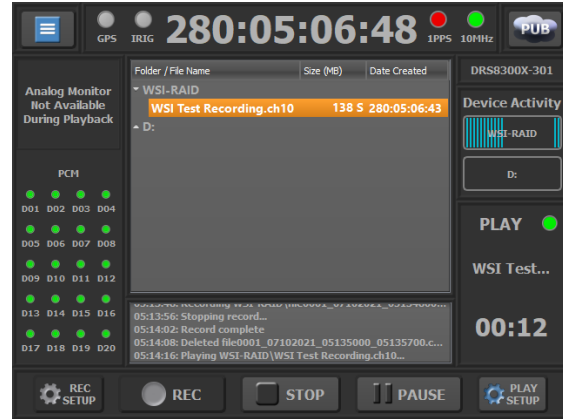

INTERFACE OPTIONS

Standard Interface Boards:

4A4D	4 Analog (up to 80MSPS) 4 Digital PCM (up to 52 Mbps)
12D	12 Digital PCM (up to 40Mbps)
2CHA1	2 High-Speed Analog (200MSPS)
4E4S	4 Ethernet (10/100/1000-Base-T) 4 RS-232 UARTs (up to 1MBaud)
8E	8 Ethernet (10/100/1000-Base-T)
2V	2 SD/HD Videos, rates to 12 Mbps
2IFxx	2 IFs (xx = Center Frequency)
12M1553	12 MIL-STD-1553

General Analog Interface Boards:

Multi-channel, 8-16 bit A-to-D and D-to-A at 50K to 200 MSPS

General Digital Interface Boards:

1, 8, 16, 32 bits in ECL, PECL, LVDS, TTL logic

Other Interface Boards:

Telecom, CDL, Serial FPDP, CameraLink, DCRSi, DIR, and many more ...

Custom Interfaces:

Can be provided quickly and cost-effectively



*All system boards now come standard with a Display Port and dual USB 3.0 ports. VGA is no longer offered as a standard video output.

ORDERING INFORMATION

Please contact our technical sales staff to configure your Digital Recording System. Each system can be tailored to meet your interface, control, and fault tolerance requirements.

Email: sales@wideband-sys.com
Phone: +1.301.588.8840

DRS8300X WARRANTY

Wideband Systems provides:

- Industry-Leading Three-Year Limited Warranty
- No-Cost Firmware and Software Updates
- Lifetime Technical Support

Inquire today to learn more about the DRS8300X operation & control functions.



DATA RECORDING